

SYSTEM DATA SHEET

Sikafloor® Multidur ES-23

Mechanically resistant, coloured flooring system

DESCRIPTION

Sikafloor® MultiDur ES-23 is a finely textured, coloured, resin-based floor coating system. It provides a hard-wearing, seamless, low-maintenance glossy finish.

USES

Sikafloor® MultiDur ES-23 may only be used by experienced professionals.

Sikafloor® MultiDur ES-23 is used in industrial buildings such as:

- Chemical and processing facilities
- Manufacturing facilities and workshops
- Leisure and culture facilities such as museums and stadiums

PRODUCT INFORMATION

Packaging

Shelf life

Storage conditions

TECHNICAL INFORMATION

Tensile adhesion strength	≥ 1.5 MPa	(EN 1542)
Reaction to fire	Class B _{fl} -s1	(EN 13501-1)
Skid / slip resistance	R 9	(DIN 51130)

FEATURES

- Highly aesthetic appearance and finish
- Very good abrasion resistance
- Very good resistance to specific chemicals
- Very good yellowing resistance
- Very good mechanical resistance


CERTIFICATES AND TEST REPORTS

Slip resistance DIN 51130, Sikafloor® MultiDur ES-23, Roxeler, Certificate No. 020017-21-2

SYSTEM INFORMATION

System structure

Sikafloor® MultiDur ES-23

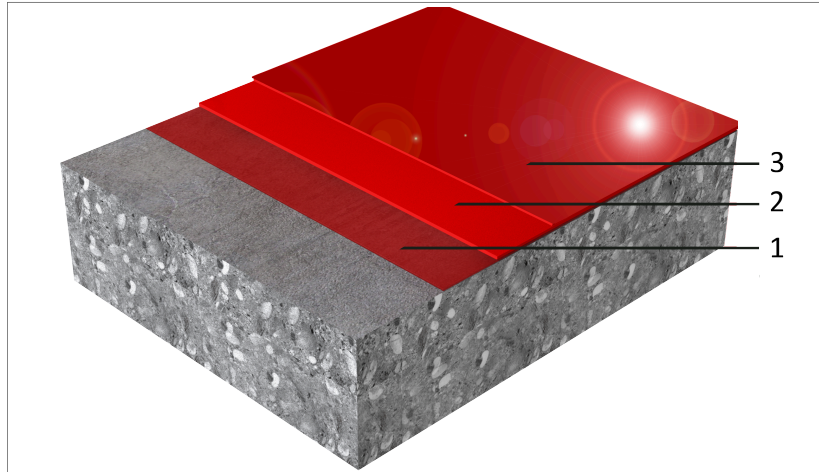

SELF-SMOOTHING / RESIN SCREED

Layer	Product
1. Primer	Sikafloor®-150 Sikafloor®-151 Sikafloor®-156 Sikafloor®-161 Sikafloor®-1590 Contact Sika technical service for information on choosing the right primer for your project.
2. Wearing layer	Sikafloor®-263 SL N Sikafloor®-264 N
3. Top coat	Sikafloor®-316 + 2 % glass beads (90–150 µm)

Composition	Epoxy and polyurea based technology
Appearance	Lightly textured, gloss finish
Colour	Cured system colour Available in various colour shades
Nominal thickness	~2 mm to 3 mm

APPLICATION INFORMATION

Consumption	Layer	Product	Consumption
	Primer	Sikafloor®-150 Sikafloor®-151 Sikafloor®-156 Sikafloor®-161 Sikafloor®-1590	1–2 × 0.3–0.5 kg/m ²
	Wearing layer	1 × Sikafloor®-263 SL N or Sikafloor®-264 N filled up to 1:1 with quartz sand (0.1–0.3 mm) by weight depending on temperature	~1.9 kg /m ² per mm thickness
	Seal coat or top coat	1 × Sikafloor®-316 + 2 % glass beads (90–150 µm) by weight	~ 0.07–0.1 kg/m ² per layer

Note: Consumption data is theoretical and does not allow for any additional material due to surface porosity, surface profile, variations in level,

wastage or any other variations. Apply the Product to a test area to calculate the exact consumption for the specific substrate conditions and proposed application equipment.

Ambient air temperature	Maximum	+30 °C		
	Minimum	+15 °C		
Relative air humidity	Maximum	80 % r.h.		
Dew point	Refer to the individual Product Data Sheet.			
Substrate temperature	Maximum	+30 °C		
	Minimum	+15 °C		
Substrate moisture content	Refer to the individual Product Data Sheet.			
Waiting time to overcoating	When using Sikafloor®-1590 refer to the individual Product Data Sheet for specific information on waiting time to overcoating.			
	Before applying Sikafloor®-263 SL N or Sikafloor®-264 N on the primer layer allow:			
	Temperature	Minimum	Maximum	
	+10 °C	17 hours	4 days	
	+20 °C	9 hours	48 hours	
	+30 °C	7 hours	24 hours	
	Before applying Sikafloor®-316 on Sikafloor®-263 SL N or Sikafloor®-264 N allow:			
	Temperature	Minimum	Maximum	
	+15 °C	18 hours	3 days	
	+20 °C	16 hours	48 hours	
	+30 °C	12 hours	24 hours	
	Note: Times are approximate and will be affected by changing ambient conditions, particularly temperature and relative humidity.			
Applied product ready for use	Temperature	Foot traffic	Light traffic	Full cure
	+15 °C	18 hours	42 hours	10 days
	+20 °C	16 hours	36 hours	7 days
	+30 °C	12 hours	24 hours	5 days

BASIS OF PRODUCT DATA

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

FURTHER DOCUMENTATION

Refer to the following method statements:

- Sika Method Statement — Evaluation and preparation of surfaces for flooring systems
- Sika Method Statement — Sikafloor® mixing and application

ECOLOGY, HEALTH AND SAFETY

User must read the most recent corresponding Safety Data Sheets (SDS) before using any products. The SDS provides information and advice on the safe handling, storage and disposal of chemical products and contains physical, ecological, toxicological and other safety-related data.

APPLICATION INSTRUCTIONS

APPLICATION

IMPORTANT

Abrasing the surface underneath the top coat

Before applying each layer of top coat, the surface must be of uniformly matt with no gloss present.

1. Abrade the application surface with a 120 grit sandpaper until the surface turns matt.
2. Remove the resulting dust with industrial vacuuming equipment and solvent wiping.

IMPORTANT

Protecting the material after application

After application, protect the System from damp, condensation and direct water contact for at least 24 hours.

LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for exact product data and uses.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.