



SikaForce[®]-7900

HIGH-PERFORMANCE ADHESIVE FOR ALUMINUM FRAME ASSEMBLY


- High modulus for structural bonding applications
- Good non-sag properties
- Easy application

BUILDING TRUST



SikaForce®-7900

SikaForce®-7900 is a two-component polyurethane adhesive that cures through the reaction of the two components. The two components are applied from a side-by-side cartridge using a manual gun or a compressed air gun. The included static mixer can be used for homogeneous mixing. SikaForce®-7900 is suitable for corner bonding of powder-coated and anodized aluminum frames and window leaf profiles, which are mainly used in windows, doors and facades.

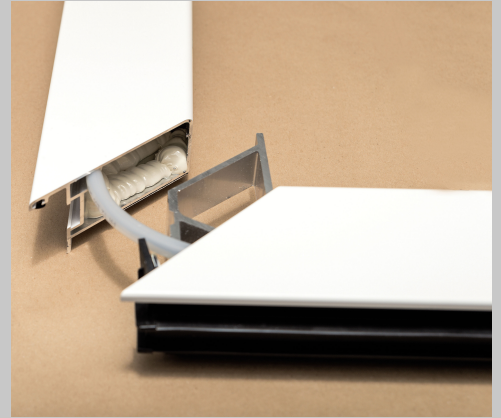

Technical Data

Mixture density	1.4 g/cm ³
Mixing ratio	1:1 (by volume)
Open time	80 min
Shore D hardness	62
Tensile lap-shear strength	8 N/mm ²

PRODUCT BENEFITS

- High strength adhesive
- Ageing-resistant
- Easy application
- Solvent-free
- Can be overpainted

Product

SikaForce®-7900

Mixture color

Cream white

Packaging

600 ml side-by-side cartridge
12 cartridges in one box
1 static mixer for each cartridge included

Recommended compressed air gun MK TS493X (Sulzer Mixpac)

Our most current General Sales Conditions shall apply. Please consult the most current local Product Data Sheet prior to use.



SIKA SERVICES AG

Tueffenwies 16
8048 Zurich
Switzerland

Contact

Phone: +41 58 436 40 40
Fax: +41 58 436 55 30
www.sika.com

BUILDING TRUST

